



REFUSE & RECYCLING BODY COMPANY

## CURB MASTER SERIES

# Side Loader



*Dual Side Loader With Independent Trough and Cart Tipper*



*Load With Blade In Any Position and Pack-on-the-Go*



*Low 35 inch Loading Height*

### **KANN Manufacturing Corporation**

210 Regent Street  
PO Box 400  
Guttenberg IA 52052 0400

**Tel** (563) 252 2035

**Fax** (563) 252 3069

**E-mail** [sales@kannmfg.com](mailto:sales@kannmfg.com)

**Web** [www.kannmfg.com](http://www.kannmfg.com)

04/2006

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# KANN

REFUSE & RECYCLING BODY COMPANY

## CURB MASTER SERIES

# Side Loader



### FEATURES

#### FUNCTION

- 8 SEC trough cycle
- 22 SEC compactor cycle
- 8 SEC cart tipper
- Pack-on-the-go

#### GENERAL

- 23, 27, 31 YD<sup>3</sup> body capacities
- 3 YD<sup>3</sup> tailgate capacity
- 4 YD<sup>3</sup> hopper capacity
- .75 YD<sup>3</sup> trough capacity
- 500 LB maximum trough lift capacity
- Trough loading height at chassis frame (approximately 35 IN from ground to trough edge)
- 100 MESH suction strainer
- 10 MICRON in-line return filter
- 60 GAL reservoir with internal baffles
- Sight/temperature gauge
- Single stage, double acting compactor blade cylinders
- Tailgate ajar light/buzzer
- White PPG paint
- Tailgate safety props
- Standard light package to comply with DOT and FMVSA standards
- Standard wiring package automatic reset circuit breakers and all wiring loom protected
- Front mount pump
- Body clean-out
- Hydraulic tailgate locks with manual overlock
- 48 GPM at 1200 RPM
- 2000 PSI operating pressure
- Double acting hydraulic cylinders
- O-ring or JIC hydraulic fittings
- Hydraulic valve #VA35 capable of 70 GPM
- Tailgate rotates 135° to dump
- Body is tapered 6 IN front to back for easy discharge
- Single or continuous cycle compactor; penetrates receiving container 12 IN eliminating feedback and provides ejection force
- Maintained pressure control system

#### CHASSIS

- 54,000-66,000 GVW
- 14,000-20,000 front GVWR
- 40,000-46,000 rear GVWR

### OPTIONS

#### SAFETY

- 10 LB or 20 LB fire extinguisher
- Camera (single, dual, hopper)

#### AXLE

- Tag
- Pusher
- Steerable tag
- Steerable pusher

#### TIPPER

- Cart tipper

#### HYDRAULICS

- 3 or 6 MICRON hydraulic return line filter
- Transmission mount PTO

#### LIGHTS

- LED lights
- Safety work light package
- Strobe light

#### PAINT


- Standard PPG other than white
- Metallic
- Multi-color
- Striping

#### MISCELLANEOUS


- Dual side loading
- On-board scales
- Tipper and troughs are interchangeable
- Rubber flap for compactor



*The large independent loading 0.75 yd<sup>3</sup> trough and cart tipper are available on street side and/or curb side providing for complete versatility of bag, bulk, and cart routes.*

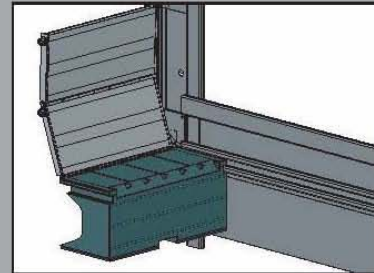

*A) The hinged follower cover allows for constant loading without commodity falling behind the compactor blade.*

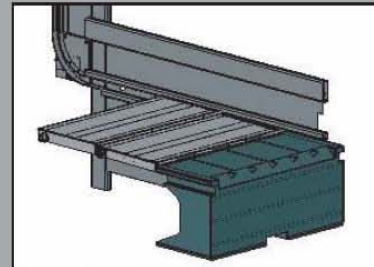

*B) The follower cover extends and retracts with the blade.*



*The KANN SL has a smooth contoured body engineered to dump refuse easily and completely clean.*

Proudly built in the USA



CONSOLIDATED DISPOSAL  
SYSTEMS, INC.

P. O. Box 813154  
Smyrna, GA 30081  
PHONE: 404-696-1530 or  
800-844-1530  
FAX: 404-696-1608